



S W O C K M

M I N I

twist lock

The Swock M MINI is the little brother in the twist lock range. This smart and flat twist lock was specially developed for applications that are installed in small spaces.

The Swock M Mini has the function of reducing (tensioning) and releasing the rope length by turning the knob.
release.

CONFIGURATION


The rope lock is available in various solutions for tightening the rope, either clockwise or counterclockwise for closing. The ropes can be led out of the housing both parallel and diagonally to each other.

OPERATION

By turning the knob clockwise, the rope is tensioned (reduce rope length) and released again in the opposite direction. There is also a variant where turning the knob counter-clockwise tensions the rope and releases it in the opposite direction.

POSSIBLE APPLICATIONS

The possible applications are many and varied. From an alternative shoe fastener instead of shoelaces or Velcro, to sports such as head size adjustment for a helmet, through to orthopaedic applications. Thanks to the flexible cable guide, several adjustments or settings can be made using one fastener, even in the tightest of spaces.

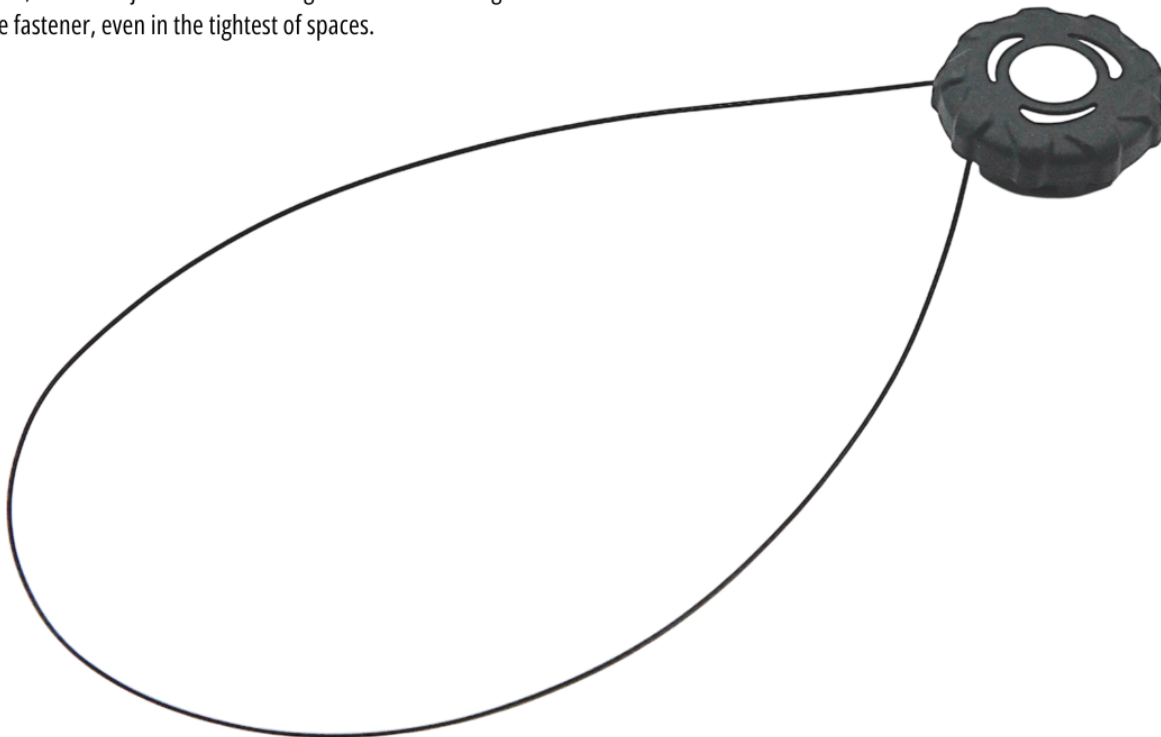



ADAPTERPLATTE TYP A
curved, narrow



ADAPTERPLATTE TYP B
curved, lateral



ADAPTERPLATTE TYP C
round, flat



ADAPTERPLATTE TYP B
Diagonal cable pull

ADAPTERPLATTE TYP C
Parallel cable pull

ASSEMBLY

We have adapter plates which can be glued, riveted or sewn onto the component.
The fastener is then clicked into place. Adapter plates are available in 3 versions.

CABLE GUIDES/DIVERTERS

We also have various standard rope deflectors in our range. These guide the rope in a defined position and help to achieve optimum force distribution. The rope is clicked into the guides, making it easy to replace or install.



DIRECTOR
TYP 4



DIRECTOR
TYP 1



DIRECTOR
TYP 2



DIRECTOR
TYP 3



DIRECTOR
TYP 4

TECHNICAL DATA

Power transmission: bis 2:1
Diameter: 30 mm
Height: 12.5 mm
Rope diameter: 1 mm
Rope adjustment range: max. 220 mm